

ZENVIDA

PRODUCT NAME : **Zenvida Lamp**
SKU : **275-FLRL02**
TEL : **855-349-4327**
HTTP : **bit.ly/ZENVIDA**
EMAIL : **priority@zenvidahome.com**

Don't Panic!
We are here for you.

STOP

Call 855-349-4327 9AM-5PM EST M-F

OR

email: priority@zenvidahome.com
anytime for help with this product

Reaching out via product review, marketplace email, social media or leaving seller feedback may cause a delay in response. If you have questions about this product or need anything, please reach out. You are our priority!

FEATURES

Article Code	: SQUOL GRADIENT - 6W
Model	: Gradient square pattern
Environment	: Indoor
Material	: Pyinkado solid wood, powder coated steel
IP rating	: 65


DIMENSIONS


Product dimensions

Length	: 153mm
Width	: 153mm
Height	: 655mm
Cord length	: 500mm

LUMINAIRE

Watt	: 6W
Voltage	: 90-265V
Bulblight color	: Warm white

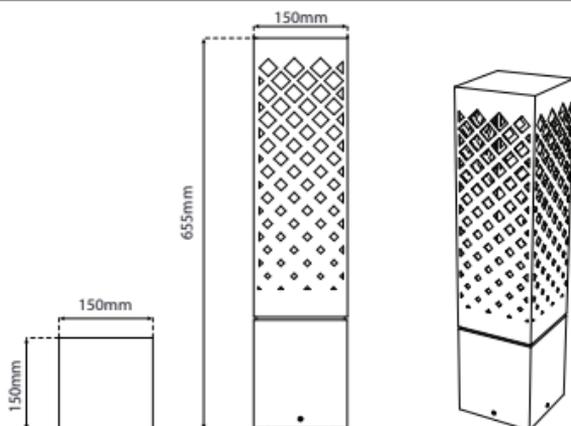TECHNICAL DRAWINGS

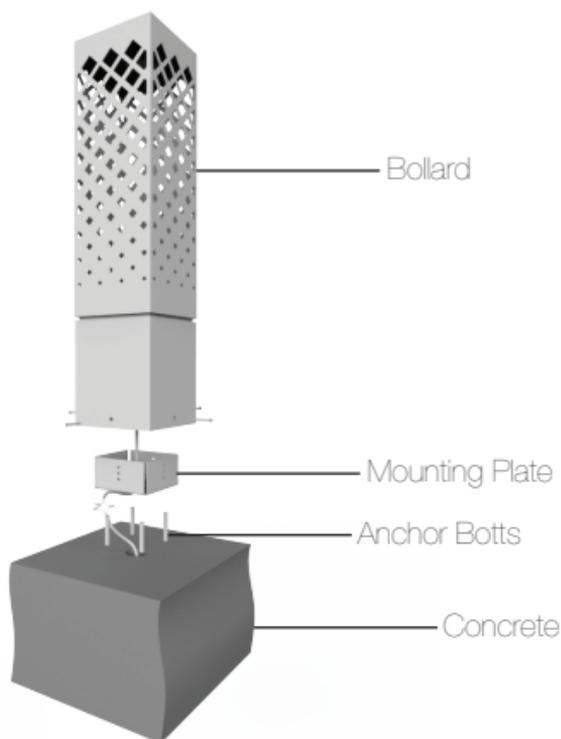

Step 1: Disconnect the power by turn it off at the circuit breaker panel.

Step 2: Install 4 suitable anchor bolts (C) (not included) in the foundation (D). Mounting plate (B) may also be used as the template.

Step 3: Place the mounting plate (B) over anchor bolts (C). In sure the leads electrical wires (E) are passing up through the center hole of mounting plate (B).

Step 4: Use leveler to ensure that the mounting plate (B) is leveled.

Step 5: Tighten mounting plate (B) to the foundation (D).

Step 6: Make sure supply leads extend far enough to make fixture connections (E). Make the wiring connections with the local electrical code.

Step 7: Align bollard (A) to mounting plate (B) and secure with four screws (F) provided.

Step 8: Restore power at the circuit breaker panel.



Step 1: Connect the bare copper ground wire (yellow and green) from fixture to supply ground.

Step 2: Connect the brown (live wire) fixture lead to the (+) LINE supply lead.

Step 3: Connect the blue (neutral wire) fixture lead to the (-) COMMON supply lead.